


### 102046-GP

Load Capacity	75 lbs
Temp. Range	-40°F to 300°F

#### Features

- Unground, non-precision
- Stamped metal construction
- Zinc plated mild steel
- Full ball compliment
- Front seal
- Replaceable
- Grease packed

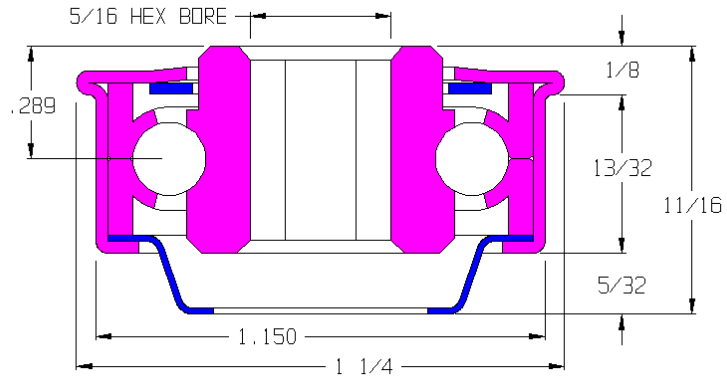

#### Application Info

Recommended for slow powered conveyor and gravity conveyor applications. Not recommended for high speeds. A metal sealing ring protects against dirt and debris without adding rotational drag. Not effective against small particle dust.

#### Similar Bearings

102043-O is lightly oiled and not sealed.

