


### 102249-GP

Load Capacity	425 lbs
Temp. Range	-20°F to 350°F

#### Features

- Unground, non-precision
- Stamped metal construction
- Zinc plated mild steel
- Full ball compliment
- Replaceable
- Grease packed

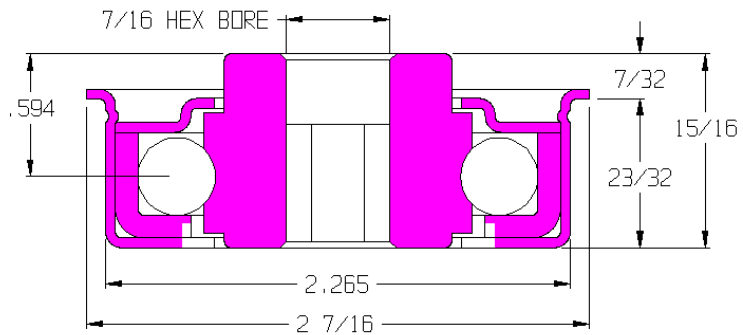

#### Application Info

Recommended for slow powered applications and gravity conveyor applications. The lack of seals or shields reduces drag but offers no protection against dirt and debris. Not recommended for dirty or dusty environments. Not recommended for high speeds or CDLR.

#### Similar Bearings

- 102249-O is lightly oiled.
- 102195-GP has a 1/2 dia. round bore.
- 102164-GP has an 11/16 hex bore.
- 102310 is an equivalent adapter assembly.
- 114193-GP is an equivalent poly-housed ABEC bearing.

