


### 102255-O

Load Capacity	135 lbs
Temp. Range	-20°F to 140°F
Max Speed	200 rpm

#### Features

- Unground, non-precision
- Stamped metal construction
- Zinc plated mild steel
- Full ball compliment
- Lightly oiled

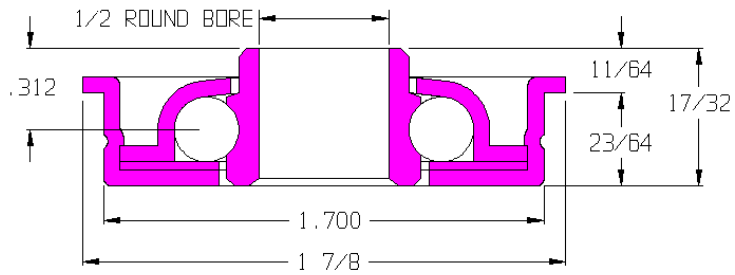

#### Application Info

Light oil offers very little rotational drag making this bearing excellent for gravity applications. The lack of seals or shields further reduces drag but offers no protection against dirt and debris. Not recommended for dirty or dusty environments. The light oil is not recommended for powered applications where the bearing is rotating continuously.

#### Similar Bearings

- 102188-O has a 1/4 dia. bore.
- 102259-O has a 5/16 dia. bore.
- 102248-O has a 5/16 hex bore.
- 102293-O has a 3/8 dia. bore.
- 102292-O has a 3/8 hex bore.
- 115899-O has a 7/16 hex bore.
- 113584-O is an equivalent semi-precision bearing.

