


## 102310

Load Capacity	145 lbs
Temp. Range	-40°F to 250°F

### Features

- Unground, non-precision
- Stamped metal construction
- Zinc plated mild steel
- Full ball compliment
- Front and rear seals
- Stamped metal adapter
- Grease packed

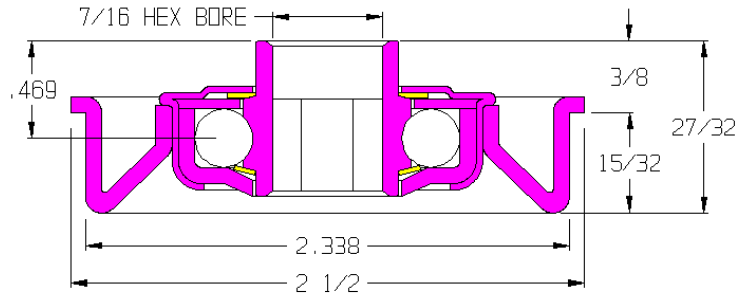

### Application Info

Grease keeps this bearing lubricated for continuous use but increases the rotational drag. Recommended for light-duty, belt powered applications or gravity applications. A polymer sealing ring holds out large particle debris but is not effective against a lot of dust or fine particle dust. Not recommended for high speeds or CDLR.

### Similar Bearings

102309 is unsealed and lightly oiled.

### Special Notes

102053-GP is the bearing part number.  
102058 is the adapter part number.

