
# 44837-0

Load Capacity	145 lbs
Temp. Range	-40°F to 140°F

#### **Features**

- Unground, non-precision
- Stamped metal construction
- Zinc plated mild steel
- · Full ball compliment
- · Stamped metal adapter
- · Lightly oiled

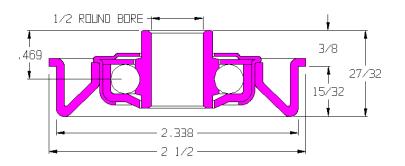

#### **Application Info**

Light oil offers very little rotational drag making this bearing excellent for gravity applications. The lack of seals or shields further reduces drag but offers no protection against dirt and debris. Not recommended for dirty or dusty environments. The light oil is not recommended for powered applications where the bearing is rotating continuously.

## Similar Bearings

44836-O has an adapter for 2-1/4 OD tubes.

44833-O has a 5/16 hex bore.

44835-O has a 3/8 hex bore.

102195-O is an equivalent unground press fit bearing.

## Special Notes

102181-O is the bearing part number.

102058 is the adapter part number.





Semi-















Unground

Unground Stainless

Precision

Semi-Precision **Stainless** 

Precision

Precision **Stainless** 

**Plastic** 

Seals

Shields

**Ball Retainer** 

www.omni.com